

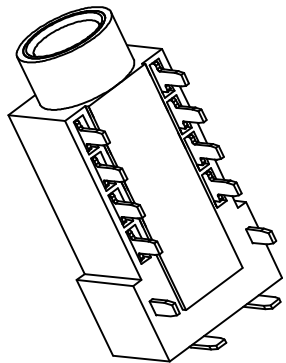

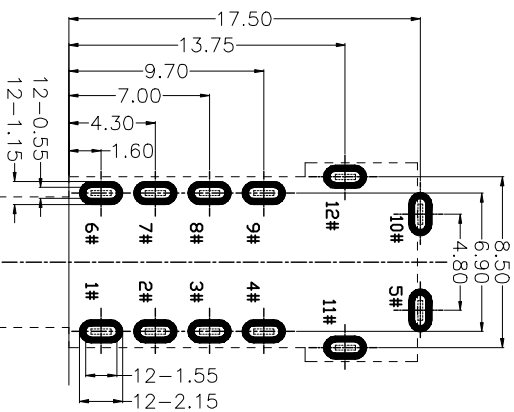
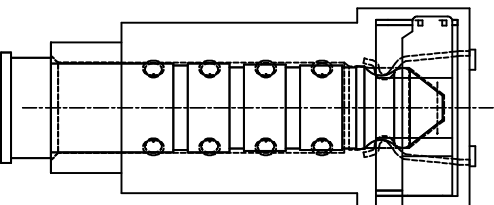



ROHS
Compliant

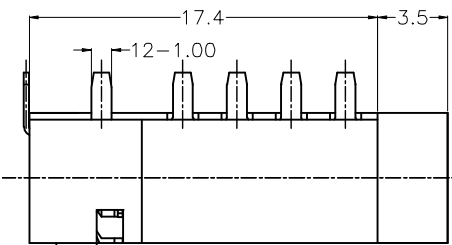

3D VIEW

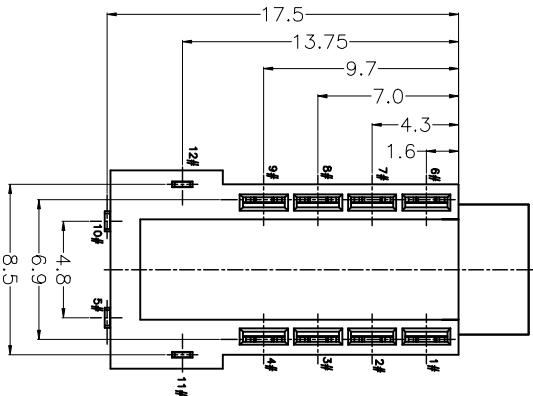

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05



15	Sleeve	Copper Alloy	G/F Plated Overall.	1
14	Separator	Thermoplastics 94V-0 Color Black		1
13	Housing	Thermoplastics 94V-0 Color Black		1
12	Switch-B(+)	Stainless Steel	G/F On Contact Area& Solder Tails Ni Plated Overall.	1
11	Switch-A(-)	Stainless Steel	G/F On Contact Area& Solder Tails Ni Plated Overall.	1
5/10	Left+ Contact	Copper Alloy	G/F On Contact Area& Solder Tails Ni Plated Overall.	1
4/9	Right+ Contact	Copper Alloy	G/F On Contact Area& Solder Tails Ni Plated Overall.	1
3/8	Left- Contact	Copper Alloy	G/F On Contact Area& Solder Tails Ni Plated Overall.	1
2/7	Right- Contact	Copper Alloy	G/F On Contact Area& Solder Tails Ni Plated Overall.	1
1/6	GND Contact	Copper Alloy	G/F On Contact Area& Solder Tails Ni Plated Overall.	1

LZG INDUSTRIAL CO., LTD

PART NAME	Ø3.5 PHONE JACK CONNECTOR	TOLERANCE UNLESS	0.0±0.25	0.±2'	UNIT:	mm	DRAWING NO.	ZB44001-12DBAP-A	SHEET	1/1
PART NO.	ZB44001-12DBAP-A	OTHERWISE SPECIFIED:	0.000±0.10	0.0±1'			DATE:	2020.02.18	DWG. NO.	

ZONE	ECN. NO.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2020.02.18

- NOTES
- 1.Current Rating: 12V&1A max.
 - 2.Contact Resistance: 50mOhms Max.(initial)
 - 3.Insulation Resistance: 100M Ohms Min./500V DC
 - 4.Dielectric Withstanding Voltage: 500V AC/1Minute
 - 5.Mating Force: 35N Max, Withdrawal Force: 3N Min.
 - 6.Durability: 5,000 Cycles
 - 7.Operating Temperature:-25°C to+85°C

DRAWING:	林生财	DATE:	2020.02.18	SCALE	1:1
CHECK:	李林鑫	DATE:	2020.02.18	MATERIAL	*
APPROVAL:	魏进宝	DATE:	2020.02.18	DWG. NO.	